







**AQUAPORE FORTE**

**Water-based Reinforced superhydrophobic product for porous facades**

<p><b>Product description</b></p>	<p>Reinforced hydrophobic product based on nanoparticles of very high-performance <b>dispersed in water</b>. <b>Transparent, non-visible, breathable, high-performance protector</b>, mainly designed to protect porous and low porous building materials (facades or other vertical surfaces) from the action of water. Non-flammable formula.</p>
<p><b>Uses</b></p>	<p>The active compound that produces the water-repellency are nanoparticles dispersed in water, therefore <b>AQUAPORE FORTE</b> is compatible with any porous building substrate.</p> <p>Designed to be applied as a water repellent by means of surface treatment on all types of facade materials such as <b>facing bricks, mortars, monolayer, concretes, prefabricated materials, natural stone and mixed surfaces in which different materials and porosities are mixed</b>.</p> <p>Used as a facade protector both in rehabilitation and new construction.</p> <p>In the cleaning and maintenance sector it is also used as an anti-urine due to its great repellent effect that reduces the accumulation of dirt and bad smells.</p> <p>Due to its water-based composition, AQUAPORE FORTE is also suitable for indoor applications.</p> <div data-bbox="464 943 1417 1155" style="display: flex; justify-content: space-around; align-items: center;">      </div>
<p><b>Features and advantages</b></p>	<ul style="list-style-type: none"> <li>▪ It reduces the absorption of water and delays the appearance of any external agent produced by humidity (algae, moss, mould, etc.).</li> <li>▪ It does not form film, does not cross-link, allowing the complete breathability of the substrate.</li> <li>▪ High resistance and great durability on surfaces not subjected to strong mechanical action/ continuous abrasion. Guaranteed durability of 10 years against external environmental conditions on facades.</li> <li>▪ Total UV resistance.</li> <li>▪ Fully transparent, respecting the natural colour of the original material.</li> <li>▪ Unlike most conventional products, it allows for complete re-application without the need to remove previous product remains.</li> <li>▪ The active compounds do not react with the treated surface, keeping the substrate unaltered.</li> <li>▪ Thanks to its high water repellency (large rebound of water from the surface) it keeps surfaces free of dust and dirt for longer.</li> </ul>
<p><b>Product information. Composition and physicochemical properties.</b></p>	<ul style="list-style-type: none"> <li>▪ <b>Colour:</b> Colourless, translucent liquid.</li> <li>▪ <b>Packaging:</b> 1L, 5L and 25L (larger volumes on request)</li> <li>▪ <b>Storage:</b> 12 months from the date of manufacture in the original sealed container at temperatures between 5°C and 30°C.</li> <li>▪ <b>Volatile Organic Content (VOC)</b> &lt;25% wt</li> <li>▪ <b>Density:</b> 0,955 g/ml</li> <li>▪ <b>Viscosity:</b> 3,25 cP</li> <li>▪ <b>Boiling Point:</b> 100°C</li> <li>▪ <b>Solvent:</b> water</li> </ul> <div data-bbox="1177 1823 1417 2024" style="text-align: right;">  </div>

**AQUAPORE FORTE**

**Water-based Reinforced superhydrophobic product for porous facades**

**Surface preparation**

Before application, clean the surface and remove all traces of detergents and cleaners. The surface must be completely clean. Avoid the presence of fissures or cracks in the substrate. It is recommended, if possible, to remove them beforehand. Pay special attention also to materials with high porosity that may have transport pores or open pores of a considerable size as this may influence the final amount of product to be applied. For this purpose, it is recommended to carry out a preliminary test as described in the section "Yields and storage". In case of presence of microorganisms (moulds, algae, etc.) it is recommended to remove them thoroughly before the application of the product.


**Application information**

SHAKE THE CONTAINER BEFORE ITS USE.

- The product is applied directly on the surface preferably by spraying (airless, turbines, backpacks or hand-held sprayers), brush or roller. Two applications are recommended (each application is a cross coat, as in Figure 1). Apply the second coat immediately after the first one.

**Graphic description:**

**Application (2 coats):**

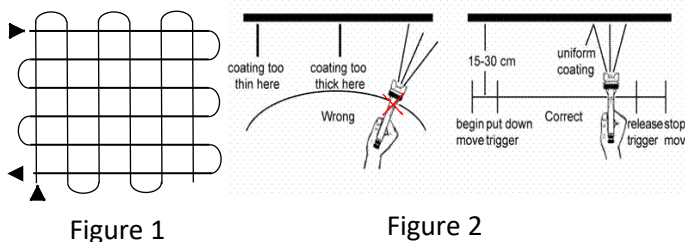

- Working tools: After use, clean with a compatible solvent.

**Yields and storage**

- Dilution: none
- Yield: Always apply the required amount of product, which will depend on the quality and porosity of the material. It is recommended to carry out a preliminary test before application in order to determine the proper yield in each case. The following is a reference table with generic yields, although there can always be exceptions, so it is advisable to test beforehand to ensure the necessary quantity:

TOTAL YIELDS (for guidance only)	
MATERIAL	m <sup>2</sup> /L
Marble and low porous limestone, terrazzo, polished concrete.	8
Granite, non-polished concrete.	6-7
Sandstone, porous limestone, facing bricks	5
Monolayer mortar, rough concrete.	4
Very porous limestone and sandstone.	3-3,5

- Complete drying time: 48-72 hours.
- Operating temperature: between 5°C and 30°C.
- Storage temperature: between 5°C and 30°C; protect from direct sunlight; store in original container tightly closed.

**Observations**

- The high water repellent effect it exhibits from its first moments (superhydrophobicity – contact angle of water droplets with the surface > 150°) decreases on surfaces subjected to continuous friction, especially in humid conditions, although the water protection is still maintained.

## AQUAPORE FORTE

### Water-based Reinforced superhydrophobic product for porous facades

	<ul style="list-style-type: none"> <li>▪ It is recommended to apply the product at temperatures between 5°C and 30°C.</li> <li>▪ Carry out an initial test on painted surfaces to check compatibility.</li> <li>▪ In case of future applications of water-based paints, reconstructions with different mortars or other products on the treated surface may be limited by the existing hydrophobic effect.</li> <li>▪ This product is not suitable for medical and pharmaceutical use.</li> </ul>
<b>Handling precautions</b>	<p>Product information necessary for safe use is not included in this document. Before handling the product, read the material safety data sheets and package labels for safe use and for information on physical and health hazards. Material safety data sheets are available and supplied by TECNAN.</p>
<b>Limited warranty information</b>	<p><b>Please read it carefully:</b></p> <p>The information and recommendations in this document are given in good faith on the basis of TECNAN's experience and knowledge when stored, handled and applied correctly and under normal conditions within its useful life. However, because the conditions, types of materials to be treated and methods of use of our products are beyond our control, this information must be used correctly, verifying in preliminary tests that the product, the performance to be applied, the aesthetic finish and its purpose are suitable, even if other recommendations or advice have been received. TECNAN reserves the right to modify the properties of the product. TECNAN's only guarantee is that the product will comply with the sales specifications in force at the time of dispatch. Confirmation of payment and/or order implies acceptance of the product properties by the customer. TECNAN only guarantees the replacement of the product in the event of a manufacturing defect, and declines any other type of responsibility for the product, its application, as well as any additional damage it may cause. TECNAN specifically disclaims any other express or implied warranty of fitness for a particular purpose or merchantability. TECNAN declines responsibility for any damage caused accidentally or in case of incorrect use. Users must be familiar with the latest updated version of the Technical Data Sheet and for that TECNAN will provide a copy on request.</p>