

TECNADIS MULTICOAT CLASSIC

Non-stick ceramic nano protector with easy-to-clean properties for metals, ceramics, plastics and other surfaces.

Product Description


Tecnadis MULTICOAT CLASSIC is a non-stick ceramic nano protector with easy-to-clean properties and high hardness for metal, porcelain, plastic or painted surfaces and low porosity materials.

The product, **which is not a paint**, is based on a dispersion of ceramic nanoparticles that creates a **colourless non-stick protective layer** that provides **gloss** and **hardness** to the treated surface. It also prevents premature deterioration caused by **external agents** such as **water, ice, humidity, rust, saltpetre, corrosion, UV radiation**, as well as deterioration caused by **dirt (stains, oils, grease, graffiti, scratches, limescale, etc.)**.

Applications and uses

Tecnadis MULTICOAT CLASSIC can be directly applied on:

- **Metal** surfaces such as: steel, iron, aluminium, copper, bronze, brass, enamelled steels, etc.
- **Plastics**
- **Painted** surfaces
- **Ceramic/porcelain** surfaces
- **Low porosity materials:** natural stone, concrete, mortar.

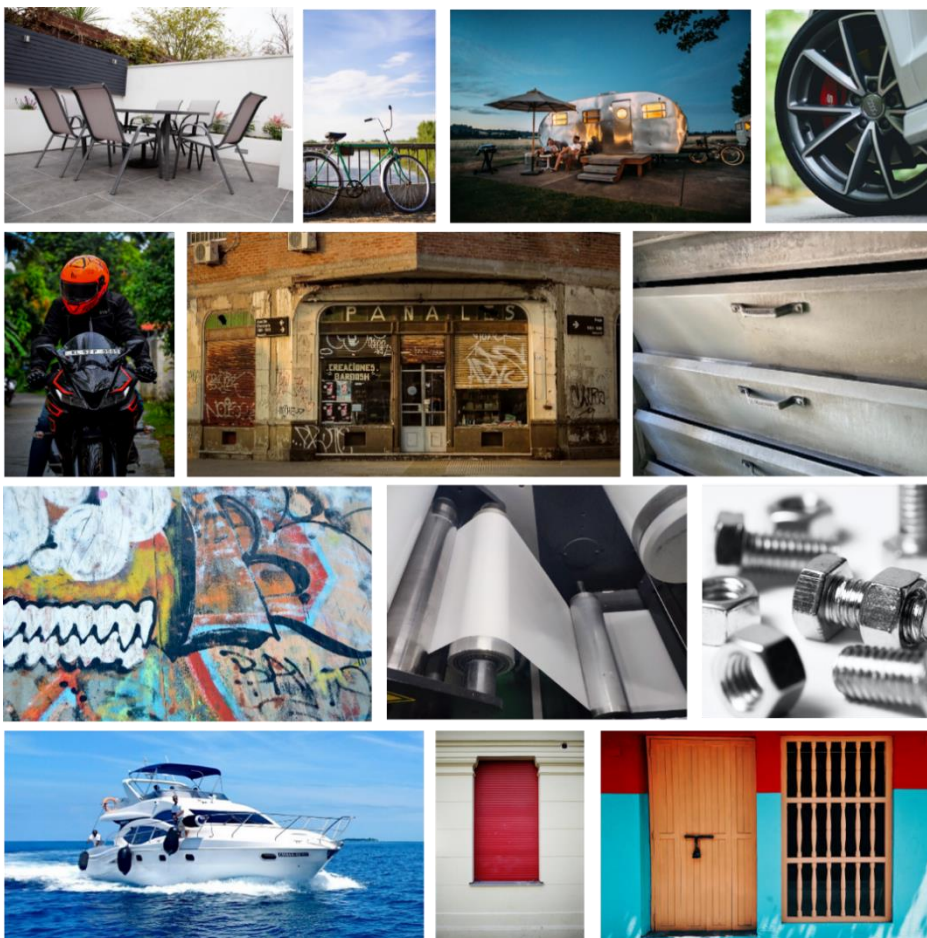

TECNADIS MULTICOAT CLASSIC

Non-stick ceramic nano protector with easy-to-clean properties for metals, ceramics, plastics and other surfaces.

	<p>Uses: It can be used in a wide variety of sectors, for example:</p> <ul style="list-style-type: none"> • Industrial maintenance: Paint booths, painting tools, metal and plastic structures, conveyor belts, tanks, rollers, tools, condensers, machine tools, etc. • Urban maintenance: protection against graffiti, urine, stain, etc. Benches, litter bins, lampposts, children's playgrounds, public toilets, sculptures, MUPIS, signage, etc. Alternative solution to lacquering surfaces. • Signs and infrastructure: Roads, airports, train/metro/bus stations, buildings, etc. • Nautical maintenance: boat hulls, fishing tackle, etc. • Construction and maintenance of buildings and homes: facades, skirting boards, countertops, railings, doors, windows, mailboxes, outdoor furniture, etc. • Vehicle components: car body, rims, quads, motorcycles, bikes, etc.
Features and advantages	<ul style="list-style-type: none"> • Non-stick nano protector with easy-to-clean properties for metals, ceramics, plastics or painted surfaces. • It creates a colourless protective layer that provides gloss and hardness to the treated surface. It does not modify the colour of the substrate on which it is applied. • It acts as protective barrier, preventing premature deterioration caused by external agents such as water, ice, humidity, rust, saltpetre, corrosion, UV radiation, graffiti, urine, as well as natural deterioration caused by dirt or scratches. • High durability: more than 3 years. • Easy maintenance, cleaning and demoulding, thanks to its non-stick properties. • It extends the lifetime of materials, making maintenance and cleaning intervals longer. • Room temperature curing. It does not require heat. However, the curing process can be accelerated with temperature of 120-130°C for 1 hour. • Resistant to temperatures around 140-150°C. • Resistant to solvents and common cleaning products. • The final thickness of the standard coating is between 10-20 microns, but it can vary depending on the properties sought. • Easy application, by aerosol or spray gun. • Great adhesion to surfaces. • Re-applicable. It is possible to repair damaged areas without having to remove the previous coating remains. If necessary, it can be removed by surface polishing.

TECNADIS MULTICOAT CLASSIC

Non-stick ceramic nano protector with easy-to-clean properties for metals, ceramics, plastics and other surfaces.

Product information.
Composition and physico-chemical properties.

TECNADIS MULTICOAT CLASSIC	
Colour	White
Active Components	20-30%
Solvent	Ethanol
Density	0,85 -1,05 g/ml
pH value	8-9

- **Packaging:** 400 ml (aerosol), 1L, 5L, 25L
- **Bulk storage:** Tecnadis MULTICOAT CLASSIC has a shelf life of 12 months from the date of manufacture, stored tightly closed in the original hermetically sealed container at temperatures between 5°C and 30°C.

Surface preparation

The surface must be clean and dry before application. Avoid dust or solid particles of any kind on the surface. It is recommended to remove all traces of oxidation or corrosion.


Degrease the surface to be protected with appropriate solvents or cleaners.

How to use it


1. **PREPARATION:** It is recommended to shake the container vigorously before its use to ensure homogeneity of the product.

2. **APPLICATION:**

2.1) **AEROSOL:** Spray Tecnadis MULTICOAT CLASSIC evenly over the surface at a distance of 25-35 cm, keeping the container in a vertical or slightly inclined position until the desired finish is achieved (avoiding overspray and sagging as far as possible).

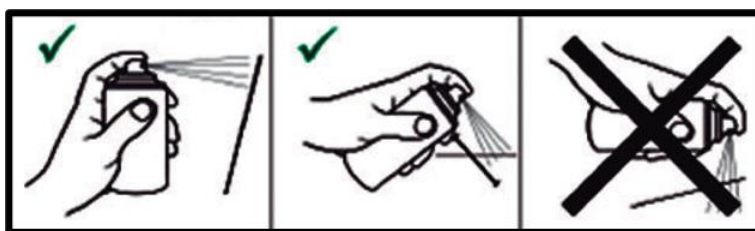

After its use, clean the aerosol nozzle by pressing the button upside down until only gas comes out.



In the unlikely event of clogging, make a fluid such as ethyl alcohol or water pass through the nozzle.

TECNADIS MULTICOAT CLASSIC

Non-stick ceramic nano protector with easy-to-clean properties for metals, ceramics, plastics and other surfaces.

	<p><u>Average yield approx. 3-5 m²/aerosol.</u> This may vary depending on the nature, porosity and roughness of the surface.</p> <p>2.2) BULK: Spray Tecnadis MULTICOAT CLASSIC evenly over the surface until the desired finish is achieved (avoiding overspray and sagging as far as possible). It is recommended to apply the product by means of a compressed air sprayer, electric airless sprayer or automated spraying systems for industrial series.</p> <p><u>Average yield approx. 10-15 m²/L.</u> This may vary depending on the nature, porosity and roughness of the surface.</p> <p>3. DRYING: The curing process necessary to achieve the adhesion of the product to the substrate can be carried out either at room temperature or by curing at a temperature of 120-130°C for 1 hour. In the case of room temperature curing, the product will be dry-to-touch after approximately 4 hours (this type of curing will depend on the environmental conditions, reactivity and the type of substrate). Nevertheless, the product will show high performance after 24 hours, being the optimum curing after 1-2 weeks. It is recommended not to subject the treated surface to mechanical abrasion or intensive cleaning before this time.</p> <p>Note: In case of seeking to maximise the non-stick and easy-to-clean properties, an additional layer of Tecnadis MULTICOAT ENHANCER could be applied.</p> <p><u>Recommendations:</u></p> <ul style="list-style-type: none"> • Irritant. Apply it wearing a filter mask to protect yourself from gases and particles. Carry out the application in a well-ventilated place. • If there is any product excess, remove it immediately with a dry cloth and a solvent such as acetone or isopropanol.
Yields and storage	<ul style="list-style-type: none"> • Dilution: none • Yield: Depending on the nature, porosity and roughness of the material: <ul style="list-style-type: none"> - <u>AEROSOL:</u> Average yield approx. 3-5 m²/aerosol. - <u>BULK:</u> Average yield approx. 10-15 m²/L. • Storage temperature: between 5°C and 30°C; protect from direct sunlight; store tightly closed in original container.
Observations	<ul style="list-style-type: none"> • Keep away from heat/open flames and avoid freezing. • Shake the product before its use. The material contained may settle slowly. • Tecnadis MULTICOAT CLASSIC has a shelf life of 12 months from the date of manufacture, stored in bulk, in the original tightly closed hermetic container at temperatures between 5°C and 30°C. • It is recommended to carry out an initial test on a small area of the material to be treated in order to verify the correct application of the product. • It is recommended to apply the product at temperatures between 5°C and 30°C. • This product is not suitable for medical or pharmaceutical uses.

TECNADIS MULTICOAT CLASSIC

Non-stick ceramic nano protector with easy-to-clean properties for metals, ceramics, plastics and other surfaces.

Handling precautions	Product safety information required for safe use is not included in this document. Before handling, read material safety data sheets and container labels for safe use, physical, and health hazard information. Material safety data sheet (MSDS) is available from TECNAN.
Limited warranty information	<p>Please read it carefully:</p> <p>The information and recommendations in this document are given in good faith on the basis of TECNAN's experience and knowledge when stored, handled and applied correctly and under normal conditions within its useful life. However, because the conditions, types of materials to be treated and methods of use of our products are beyond our control, this information must be used correctly, verifying in preliminary tests that the product, the performance to be applied, the aesthetic finish and its purpose are suitable, even if other recommendations or advice have been received. TECNAN reserves the right to modify the properties of the product. TECNAN's only guarantee is that the product will comply with the sales specifications in force at the time of dispatch. Confirmation of payment and/or order implies acceptance of the product properties by the customer. TECNAN only guarantees the replacement of the product in the event of a manufacturing defect, and declines any other type of responsibility for the product, its application, as well as any additional damage it may cause. TECNAN specifically disclaims any other express or implied warranty of fitness for a particular purpose or merchantability. TECNAN declines responsibility for any damage caused accidentally or in case of incorrect use. Users must be familiar with the latest updated version of the Technical Data Sheet and for that TECNAN will provide a copy on request.</p>