

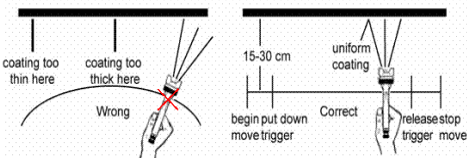


**TECNADIS PRS PERFORMANCE**  
**Hydrophobic and oleophobic product for facades and floors of porous materials**

<p><b>Product description</b></p>	<p>High performance <b>hydrophobic and oleophobic product</b> based on nanoparticles for floors and facades made of any type of porous materials.</p> <p><b>Transparent, breathable and high-performance protector</b>, mainly designed for the <u>protection against water, oil and stains in general</u>, facilitating their cleaning, as well as everyday dirt (coffee, soft drinks, etc). Also, it presents <u>protection against graffiti</u> (facilitates its cleaning) and <u>protection against urine</u> avoiding dirt and bad smells produced by them.</p> <p>Product of high resistance to continuous mechanical action/abrasion and of high durability.</p>
<p><b>Applications</b></p>	<p>The active compound that produces water repellency is ceramic nanoparticles dispersed in an organic media (isopropanol), therefore <b>TECNADIS PRS PERFORMANCE</b> is compatible with any porous and low porous constructive substrate. Used as a protector of vertical or tilted surfaces (facades, walls, roofs, terraces, etc.) and horizontal surfaces (interior and exterior floors), both in rehabilitation-restoration and in new construction.</p> <p>Designed to be applied as repellent to water, oil and stains in general by surface treatment on all types of porous surfaces with special application on concrete, natural stones (marble, slate, granite, limestone, sandstone), facing brick, monolayer mortars, prefabricated, clay/terrazzo, wood, etc., as well as mixed surfaces where different materials and porosities are mixed.</p> <div data-bbox="469 1173 1390 1339" style="display: flex; justify-content: space-around; align-items: center;">      </div>
<p><b>Features and advantages</b></p>	<ul style="list-style-type: none"> <li>▪ Avoid the accumulation and penetration of water on the treated surfaces. It also facilitates graffiti removal.</li> <li>▪ It does not form film, does not cross-link, allowing the complete breathability of the substrate.</li> <li>▪ Product of high resistance to continuous mechanical action/abrasion (footsteps, rolls...) and of high durability. Guaranteed durability of more than 10 years against all types of external environmental conditions on facades.</li> <li>▪ Total UV resistance.</li> <li>▪ Do not change the appearance, colour or structure of the treated substrate (in some cases, may cause a darkening of the material, almost imperceptible).</li> <li>▪ Unlike traditional products, it can be perfectly reapplied without removing the previous product remains.</li> <li>▪ The active compounds do not react with the surface, maintaining the substrate unaltered.</li> <li>▪ Thanks to its high repellency to water and stains, it keeps surfaces clean for longer than if they were not treated.</li> </ul>

**TECNADIS PRS PERFORMANCE**  
**Hydrophobic and oleophobic product for facades and floors of porous materials**

<p><b>Product information. Composition and physico-chemical properties.</b></p>	<ul style="list-style-type: none"> <li>▪ <b>Colour:</b> Colourless, translucent liquid.</li> <li>▪ <b>Formats:</b> 1L, 5L and 25L (higher volumes on request)</li> <li>▪ <b>Storage:</b> 12 months from the date of manufacture in the original sealed containers at temperatures between 5°C and 30°C.</li> <li>▪ <b>Volatile Organic Content (VOC)</b> &gt; 85% wt</li> <li>▪ <b>Density:</b> 0,81 g/ml</li> <li>▪ <b>Viscosity:</b> 6 cP</li> <li>▪ <b>Boiling point:</b> 82,5°C</li> <li>▪ <b>Flash point:</b> 11,85°C</li> <li>▪ <b>Solvent:</b> Isopropanol</li> </ul> <div style="text-align: right; margin-top: 10px;">  </div>
<p><b>Surface preparation</b></p>	<p>Before application, thoroughly clean the surfaces and remove all traces of detergents and cleaners. The Surface must be completely clean. Avoid the presence of fissures or cracks in the substrate. It is recommended, if possible, prior removal thereof.</p>
<p><b>How to use</b></p>	<ul style="list-style-type: none"> <li>▪ SHAKE THE CONTAINER BEFORE ITS USE.</li> <li>▪ <u>In the case of highly porous materials</u> (often facades, window sill, aprons or other external elements), the product is applied by spraying or with an air gun (airless standard low pressure), roller or brush. It is recommended two applications, being possible to apply the second coat over the wet substrate from the previous application, waiting for an interval of time or even over the substrate completely dry.</li> <li>▪ <u>In the case of materials of low and very low porosity,</u> (frequently tiles, countertops, hydraulic terrazzo, and interior elements) should be applied by brush, roller or sponge; the surface should be continuously smoothed with the application element until it is homogenized without observing any accumulated excess of product. This process favours a correct distribution and penetration in the substrate. Finally, wipe with a cloth or microfiber if it is considered that there are excesses, for a better distribution of the product.</li> </ul> <div style="margin-top: 20px;"> <p><b>Graphic description:</b></p> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>Figure 1</p> </div> <div style="text-align: center;">  <p>Figure 2</p> </div> </div> </div> <ul style="list-style-type: none"> <li>▪ Application tools: After use, clean them with any type of general solvent compatible with the working tools (alcohol, acetone, universal solvent).</li> </ul>

**TECNADIS PRS PERFORMANCE**  
**Hydrophobic and oleophobic product for facades and floors of porous materials**

<p><b>Yields and storage</b></p>	<ul style="list-style-type: none"> <li>▪ Dilution: none</li> <li>▪ Yield: Estimation based on the material porosity</li> </ul> <table border="1" data-bbox="464 506 1378 925"> <thead> <tr> <th colspan="2" style="background-color: #e0b0ff;">APPROXIMATED TOTAL YIELDS</th> </tr> <tr> <th style="background-color: #e0e0e0;">MATERIAL</th> <th style="background-color: #e0e0e0;">m<sup>2</sup>/l</th> </tr> </thead> <tbody> <tr> <td>Polished marble, Terrazzo</td> <td>12,5</td> </tr> <tr> <td>Low porous limestone, polished concrete</td> <td>10</td> </tr> <tr> <td>Brick, tiles</td> <td>8</td> </tr> <tr> <td>Granite, limestone, sandstone, non-polished concrete, mortar cement.</td> <td>6-7</td> </tr> <tr> <td>Extremely porous sandstone and limestone, high porous concrete</td> <td>5</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>▪ Complete drying time: 24 hours (against water) and 48 hours (against stains)</li> <li>▪ Operating temperature: between 5°C and 30°C.</li> <li>▪ Storage temperature: between 5 y 30 °C; protected from direct sunlight, store in original container tightly closed.</li> </ul>	APPROXIMATED TOTAL YIELDS		MATERIAL	m <sup>2</sup> /l	Polished marble, Terrazzo	12,5	Low porous limestone, polished concrete	10	Brick, tiles	8	Granite, limestone, sandstone, non-polished concrete, mortar cement.	6-7	Extremely porous sandstone and limestone, high porous concrete	5
APPROXIMATED TOTAL YIELDS															
MATERIAL	m <sup>2</sup> /l														
Polished marble, Terrazzo	12,5														
Low porous limestone, polished concrete	10														
Brick, tiles	8														
Granite, limestone, sandstone, non-polished concrete, mortar cement.	6-7														
Extremely porous sandstone and limestone, high porous concrete	5														
<p><b>Observations</b></p>	<ul style="list-style-type: none"> <li>▪ The high water repellent effect showed from the first time (superhydrophobicity – contact angle of the water drops with the surface &gt; 150°) decrease in those surfaces exposed to a continuous abrasion, especially in wet conditions, although it is still maintained the protection against water.</li> <li>▪ It is recommended to apply at temperatures between 5°C and 30°C.</li> <li>▪ Perform an initial test on those painted surfaces to avoid the appearance of discoloration caused by the solvent of the product (isopropanol).</li> <li>▪ Possible future applications of water-based paints, reconstructions with different mortars or other products on the treated surfaces may be limited by the hydrophobic effect.</li> <li>▪ This product is not suitable for medical or pharmaceutical uses.</li> </ul>														
<p><b>Handling precautions</b></p>	<p>The product safety information necessary for its safe use is not included in this document. Before using this product, read the material safety data sheets and the container labels for safe use and for information on physical hazards and health. The material safety data sheets are available and are supplied by TECNAN S.L. The application of the product must be carried out in a well-ventilated place. It contains a volatile solvent (Isopropanol).</p>														
<p><b>Limited warranty</b></p>	<p><b>Please read carefully:</b> The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should be used properly, verifying in preliminary tests that the product is suitable for its intended use. Suggestions of use shall not be taken as inducements to infringe any particular patent. The only guarantee of TECNAN S.L. is that the product will meet the sales specifications in effect at the time of shipment. Your exclusive remedy for breach of this warranty is limited to the refund of the purchase price or replacement of any product that is not the warranted one. TECNAN S.L. specifically disclaims any express or implied warranty of fitness for a particular purpose or marketing. TECNAN S.L. disclaims responsibility for any damage caused accidentally.</p>														